


**Model 30W1000B**  
**M1 through M5**  
**30 Watts CW**  
**1MHz–1000MHz**

The Model 30W1000B is a portable, self-contained, air-cooled, broadband, solid state amplifier designed for applications where instantaneous bandwidth and high gain are required. Push-pull circuitry is utilized in the high power stages to lower distortion and improve stability. The 30W1000B, when used with an RF sweep generator, will provide a minimum of 30 watts of swept power. Included is a front panel gain control which permits the operator to conveniently set the desired output level. The 30W1000B is protected from RF input overdrive by limiting diodes and an RF input leveling circuit which controls the RF input level to the RF amplifier first stage when the RF input level is increased above 0 dBm. The RF Amplifier stages are protected from over temperature by removing the DC voltage to them if an over temperature condition occurs due to cooling blockage or fan failure. There is a digital display on the front panel to indicate the operate status and fault conditions when an over temperature, power supply, or amplifier fault has occurred. The unit can be returned to operate when the condition has been cleared. The 30W1000B includes digital control for both local and remote control of the amplifier. This 8-bit RISC microprocessor controlled board provides both IEEE-488 (GPIB) and asynchronous, full duplex RS-232 control of all amplifier functions.

**30W1000B TYPICAL POWER OUTPUT**

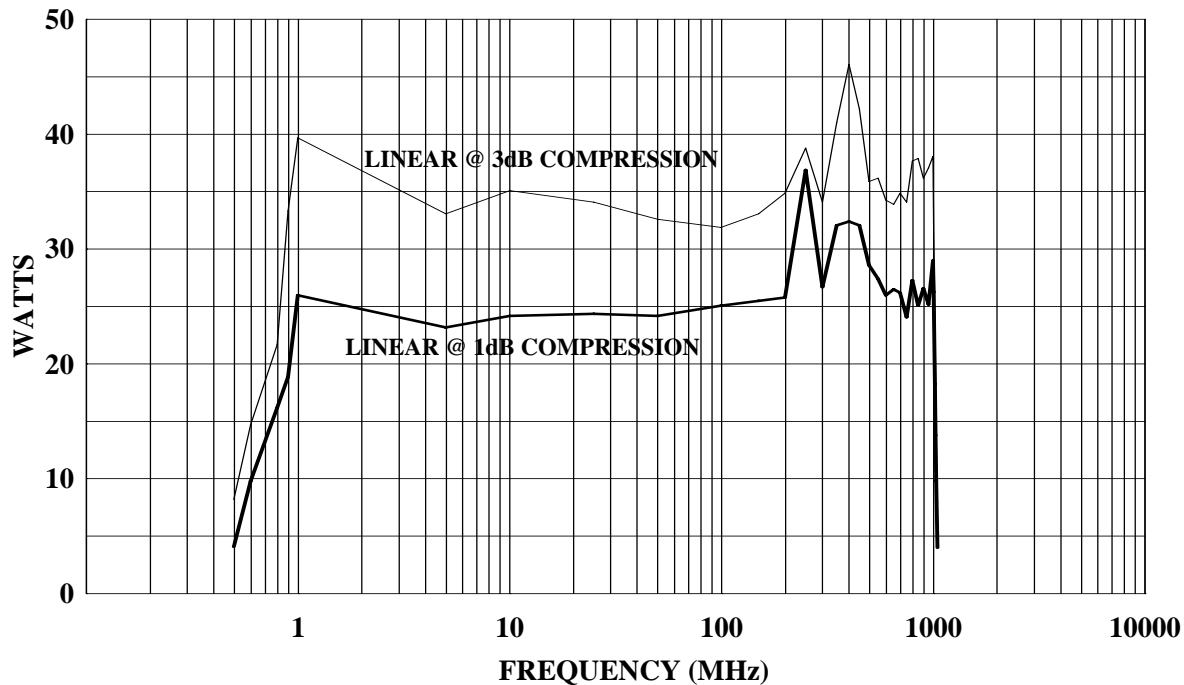

## SPECIFICATIONS, MODEL 30W1000B

RATED OUTPUT POWER .....	30 watts minimum
INPUT FOR RATED OUTPUT.....	1.0 milliwatt maximum
<b>POWER OUTPUT @ 3dB COMPRESSION</b>	
Nominal.....	36 watts
Minimum.....	30 watts
<b>POWER OUTPUT @ 1dB COMPRESSION</b>	
Nominal.....	27 watts
Minimum.....	20 watts
FLATNESS .....	±1.0 dB typical ±1.5 dB maximum
FREQUENCY RESPONSE.....	1-1000 MHz instantaneously
GAIN (at maximum setting).....	45 dB minimum
GAIN ADJUSTMENT (Continuous Range).....	20 dB minimum (4096 steps remote)
INPUT IMPEDANCE .....	50 ohms, VSWR 2.0:1 maximum
OUTPUT IMPEDANCE.....	50 ohms, nominal
MISMATCH TOLERANCE * .....	100% of rated power without foldback. Will operate without damage or oscillation with any magnitude and phase of source and load impedance.
MODULATION CAPABILITY .....	Will faithfully reproduce AM, FM, or pulse modulation appearing on the input signal
HARMONIC DISTORTION .....	Minus 20 dBc maximum at 25 watts
THIRD ORDER INTERCEPT POINT.....	52 dBm typical
PRIMARY POWER (selected automatically) .....	90-132, 180-264 VAC
.....	50/60 Hz, single phase
.....	325 watts maximum
REMOTE INTERFACES.....	IEEE-488, RS-232
<b>CONNECTORS</b>	
RF .....	Type N female
<b>REMOTE CONTROL</b>	
IEEE-488 .....	24 pin female
RS-232.....	9 pin Subminiature D female
REMOTE INTERLOCK.....	15 Pin Subminiature D
COOLING .....	Forced air (self contained fans)
WEIGHT.....	See Model Configurations
SIZE (WxHxD).....	See Model Configurations

\* See Application Note #27

### MODEL CONFIGURATIONS

MODEL	RF INPUT	RF OUTPUT	WEIGHT	SIZE (W x H x D)
30W1000B	Type N female on front panel	Type N female on front panel	20.5 kg (45.0 lb)	50.3 x 15.5 x 37.6 cm 19.8 x 6.1 x 14.8 in
30W1000BM1	Type N female on rear panel	Type N female on rear panel	20.5 kg (45.0 lb)	50.3 x 15.5 x 37.6 cm 19.8 x 6.1 x 14.8 in
30W1000BM2	Same as 30W1000B with enclosure removed for rack mounting		16.0 kg (35.0 lb)	48.3 x 12.7 x 37.6 cm 19.0 x 5.0 x 14.8 in
30W1000BM3	Same as 30W1000BM1 with enclosure removed for rack mounting		16.0 kg (35.0 lb)	48.3 x 12.7 x 37.6 cm 19.0 x 5.0 x 14.8 in
30W1000BM4	Same as 30W1000B – modified to operate when AC input applied Local/Remote Switch from toggle to rocker switch		20.5 kg (45.0 lb)	50.3 x 15.5 x 37.6 cm 19.8 x 6.1 x 14.8 in
30W1000BM5	Type N female on front panel	Type N female on rear panel	16.0 kg (35.0 lb)	48.3 x 12.7 x 37.6 cm 19.0 x 5.0 x 14.8 in
	Enclosure removed for rack mounting			